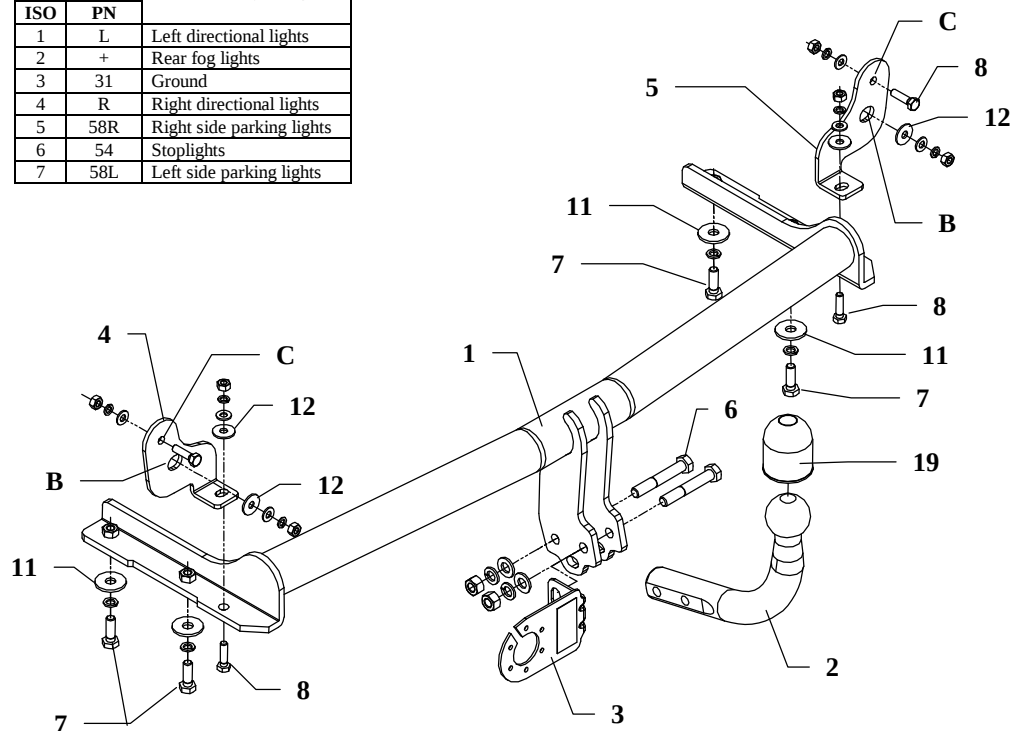


## FITTING INSTRUCTION

| Clamp mark<br>in acc. with |     | Cables joining            |
|----------------------------|-----|---------------------------|
| ISO                        | PN  |                           |
| 1                          | L   | Left directional lights   |
| 2                          | +   | Rear fog lights           |
| 3                          | 31  | Ground                    |
| 4                          | R   | Right directional lights  |
| 5                          | 58R | Right side parking lights |
| 6                          | 54  | Stoplights                |
| 7                          | 58L | Left side parking lights  |



This towbar is designed to assembly in following car:  
**VOLKSWAGEN POLO 3-5 door**, produced since 09.1999 till 12.2001  
 catalogue number **K30** and is prepared to tow trailers max total weight  
**1200 kg** and max vertical load **50 kg**.

### From manufacturer

Thank you for buying our product. This towbar is design according to rules of safety traffic regulations and their reliability has been confirmed in many tests. Reliability of towbar also depends on correct assembly and correct exploitation. For this reasons we kindly ask to read carefully this instructions and apply to hints.

*The towbar should be install in places described by car producer.*

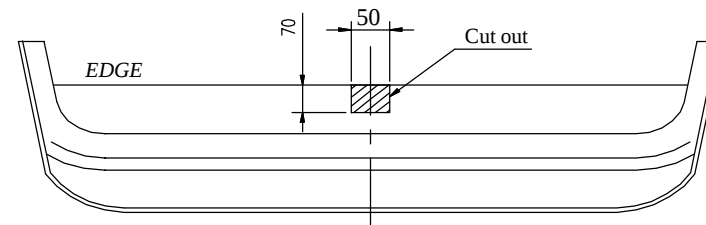


Fig. 2

### The instruction of the assembly

1. Disassemble the bumper and metal reinforcement (reinforcement will be not used any more).
2. In bottom part of the bumper cut out the hole as show in the fig. 2
3. From frame holes remove the stickers. Through this holes will be fix the towbar.
4. Put bar of the towbar (pos. 1) into the chassis member and fix with bolts M10x30mm (pos. 7), use big washers  $\varnothing 35 \times \varnothing 12 \times 3$ mm (pos. 11).
5. Put brackets (pos. 4 and 5) to the rear piece and fix it through holes pos. A to the bar of towbar using bolts M8x30mm (pos. 8), use big washers  $\varnothing 25 \times \varnothing 9 \times 2$ mm (pos. 12).
6. Through holes (pos. B) in brackets (pos. 4 and 5) fix nuts M8 with big washers  $\varnothing 25 \times \varnothing 9 \times 2$ mm. Take care at the torque moment - **10 Nm**.
7. Through holes (pos. C) in brackets (pos. 4 and 5) make holes with drill  $\varnothing 9$ mm, and next fix with bolts M8x30mm (pos. 8).
8. Fix tow-ball (pos. 2) and socket plate (pos. 3) by bolts M12x75mm (pos. 6) from accessories.
9. Screw tight all bolts according to the torque shown in the table.
10. Connect the electric wires according to the instructions of the car. (Recommended to make at service station)
11. Complete paint layer damaged during installation.

Torque settings for nuts and bolts 8,8 :

|            |       |            |        |
|------------|-------|------------|--------|
| <b>M8</b>  | 25 Nm | <b>M10</b> | 55 Nm  |
| <b>M12</b> | 85 Nm | <b>M14</b> | 135 Nm |




### NOTE

After install the tow hook you should get adequate registration in registration book (at authorised service station).The car should be equipment with:

- indicators
- tow mirrors

After 1000km of exploitation check all bolts and nuts. The ball of towbar must be always keep clear and conserve with a grease.

## Towbar accessories:

|                                                                                   |                                   |            |                                                    |                                                                                   |                                                        |
|-----------------------------------------------------------------------------------|-----------------------------------|------------|----------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------|
| Pos.<br>1                                                                         | Name: Main bar<br>Quantity: 1     | Pos.<br>6  | Name: Bolt 8,8 B<br>Quantity: 2<br>Dim. : M12x75mm | Pos.<br>13                                                                        | Name: Plain washer<br>Quantity: 2<br>Dim. : Ø 13 mm    |
|  |                                   | Pos.<br>7  | Name: Bolt 8,8 B<br>Quantity: 4<br>Dim. : M10x35mm | Pos.<br>14                                                                        | Name: Plain washer<br>Quantity: 4<br>Dim. : Ø 10,5 mm  |
| Pos.<br>2                                                                         | Name: Tow ball<br>Quantity: 1     | Pos.<br>8  | Name: Bolt 8,8 B<br>Quantity: 4<br>Dim. : M8x30mm  | Pos.<br>15                                                                        | Name: Plain washer<br>Quantity: 6<br>Dim. : Ø 8,5 mm   |
|  |                                   | Pos.<br>9  | Name: Nut 8 B<br>Quantity: 2<br>Dim. : M12         | Pos.<br>16                                                                        | Name: Spring washer<br>Quantity: 2<br>Dim. : Ø 12,2 mm |
| Pos.<br>3                                                                         | Name: Socket plate<br>Quantity: 1 | Pos.<br>10 | Name: Nut 8 B<br>Quantity: 6<br>Dim. : M8          | Pos.<br>17                                                                        | Name: Spring washer<br>Quantity: 4<br>Dim. : Ø 10,2 mm |
|  |                                   | Pos.<br>11 | Name: Washer<br>Quantity: 4<br>Dim. : Ø35xØ12x3mm  | Pos.<br>18                                                                        | Name: Spring washer<br>Quantity: 6<br>Dim. : Ø 8,2 mm  |
| Pos.<br>4                                                                         | Name: Left plate<br>Quantity: 1   | Pos.<br>12 | Name: Washer<br>Quantity: 4<br>Dim. : Ø25xØ9x2mm   | Pos.<br>19                                                                        | Name: Ball cover<br>Quantity: 1                        |
|  |                                   |            |                                                    |  |                                                        |
| Pos.<br>5                                                                         | Name: Right plate<br>Quantity: 1  |            |                                                    |                                                                                   |                                                        |
|  |                                   |            |                                                    |                                                                                   |                                                        |



**PPUH AUTO-HAK S. J.**

Produkcja Zaczepów Kulowych  
Henryk & Zbigniew Nejman  
76-200 SŁUPSK ul. Słoneczna 16K  
tel/fax (059) 8-414-414; 8-414-413  
E-mail: [office@autohak.com.pl](mailto:office@autohak.com.pl)  
[www.autohak.com.pl](http://www.autohak.com.pl)

## Towing hitch (without electrical set)

Class: **A50-X** Cat. no. **K30**

Designed for:

Manufacturer: **VOLKSWAGEN**

Model: **POLO**

Type: **3/5 door**

produced since 09.1999 till 12.2001

Technical data:

**D-value: 6,48 kN**

maximum trailer weight: **1200 kg**

maximum vertical cup load: **50 kg**

Approval number acc. to regulations EKG/ONZ 55.01: **E20-55R-01 0940**

## Foreword

This towbar is designed according to rules of safety traffic regulations. The towing hitch is a safety component and can be install only by qualified personnel. Any alteration or conversion of the towing hitch is prohibited and would lead to cancellation of design certification. Remove insulating compound and underseal from vehicle (if present) in the area of the matting surfaces of the towing hitch. The vehicle manufacturer's specifications regarding trailer load and max. vertical cup load are decisive for driving, and values for the towing hitch cannot be exceeded.

*D-value formula:*

$$\frac{\text{Max trailer weight [kg]} \times \text{Max vehicle weight [kg]}}{\text{Max trailer weight [kg]} + \text{Max vehicle weight [kg]}} \times \frac{9,81}{1000} = D \text{ [kN]}$$